




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH ECN : Page: 1/9

■ Package Dimensions:

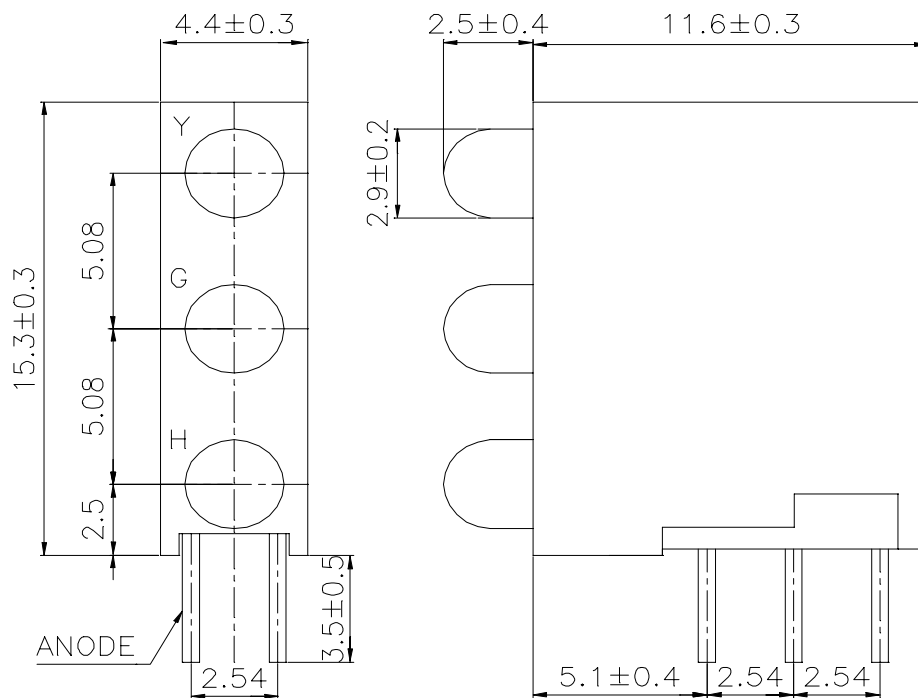

■ Notes:

- 1.All dimensions are in millimeters, tolerance is 0.25mm except being specified
- 2.Lead spacing is measured where the lead emerges from the package

LED PART NO	Chip		Lens Color
	Material	Emitted Color	
264-10HD	GaP	Bright Red	Red Diffused
264-10GD	GaP	Green	Green Diffused
264-10YD	GaAsP/GaP	Yellow	Yellow Diffused

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



■ Descriptions:

- 1.ARRAY=Plastic Holder+Combination of Lamps
- 2.The array will easily mount the applicable lamps on any panel

■ Features:

- 1.Low power consumption
- 2.High efficiency and low cost
- 3.Good control and free combinations on the colors of LED lamps
- 5.Good lock and easy to assembly
- 6.Stackable and easy to assembly
- 7.Stackable vertically and easy to assembly
- 8.Versatile mounting on PCB or panel
- 9.Stackable horizontally and easy to assembly

■ Applications:

- 1.Used as indicators of indicating the degrees, functions, positions etc, in electronic instruments.




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH ECN : Page: 3/9

■ LED LAMP ARRAYS SELECTION GUIDE:

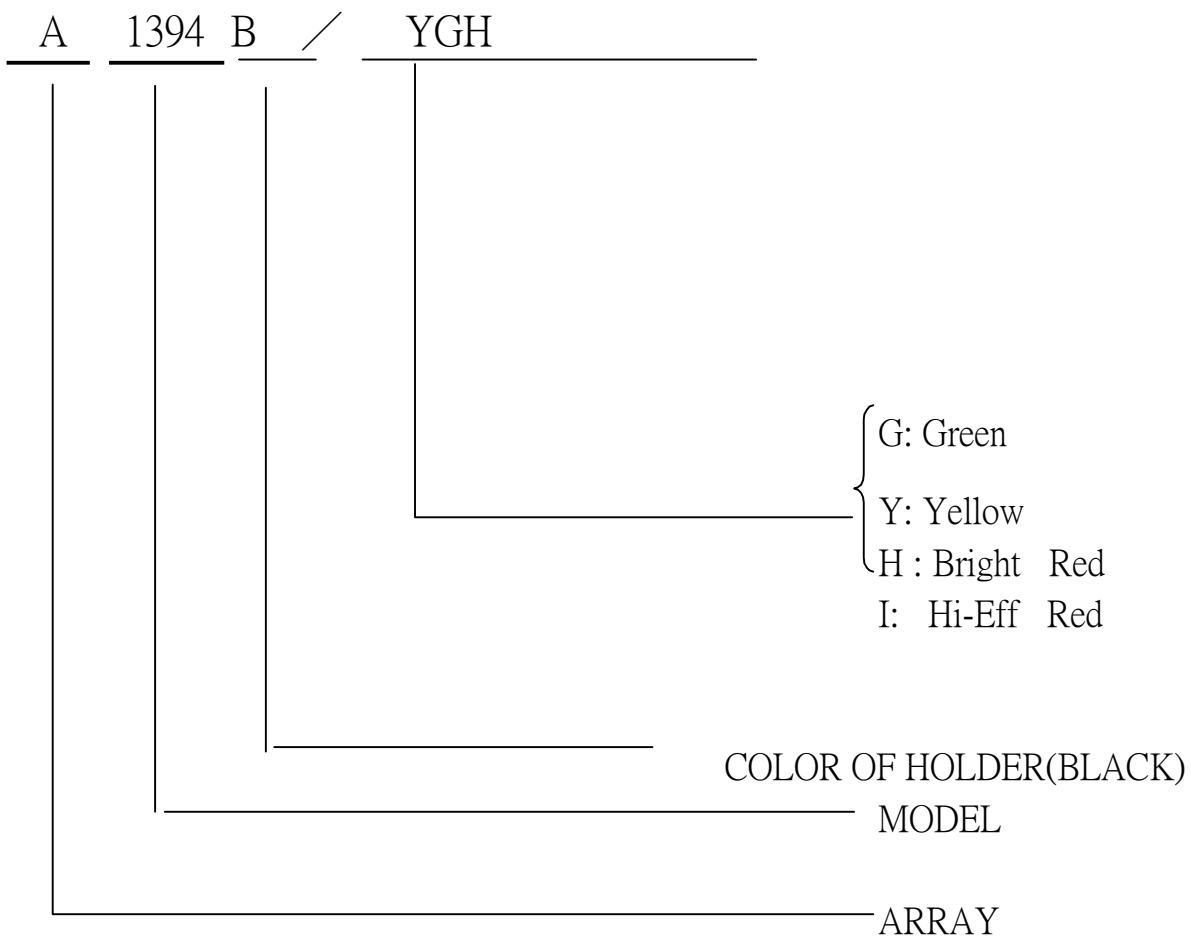



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH

ECN : Page: 4/9

Absolute Maximum Ratings at Ta = 25°C

Y

Parameter	Symbol	Rating	Unit
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	IF(Peak)	160	mA
Reverse Voltage	VF	5	V

Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	2.5	10	/	mcd	IF= 10 mA
Viewing Angle	2 θ 1/2	/	60	/	deg	IF= 20 mA
Peak Wavelength	λ p	/	585	/	nm	IF= 20 mA
Dominant Wavelength	λ d	/	590	/	nm	IF= 20 mA
Spectrum Radiation Bandwidth	△ λ	/	35	/	nm	IF= 20 mA
Forward Voltage	VF	1.7	2.0	2.4	V	IF= 20 mA
Reverse Current	IR	/	/	10	μ A	VR= 5 V

PART NO. : A1394B/YGHECN : Page: 5/9

■ Absolute Maximum Ratings at Ta = 25°C

G

Parameter	Symbol	Rating	Unit
Forward Current	I _F	30	mA
Operating Temperature	T _{opr}	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +100	°C
Soldering Temperature	T _{sol}	260 ± 5	°C
Power Dissipation	P _d	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	I _F (Peak)	160	mA
Reverse Voltage	V _R	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	2.5	10	/	mcd	I _F = 10 mA
Viewing Angle	2 θ 1/2	/	60	/	deg	I _F = 20 mA
Peak Wavelength	λ _p	/	571	/	nm	I _F = 20 mA
Dominant Wavelength	λ _d	/	570	/	nm	I _F = 20 mA
Spectrum Radiation Bandwidth	△ λ	/	30	/	nm	I _F = 20 mA
Forward Voltage	V _f	1.7	2.1	2.4	V	I _F = 20 mA
Reverse Current	I _r	/	/	10	μ A	V _F = 5 V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH

ECN : Page: 6/9

Absolute Maximum Ratings at Ta = 25°C

H

Parameter	Symbol	Rating	Unit
Forward Current	I _F	15	mA
Operating Temperature	T _{opr}	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +100	°C
Soldering Temperature	T _{sol}	260 ± 5	°C
Power Dissipation	P _d	45	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	I _F (Peak)	50	mA
Reverse Voltage	V _R	5	V

Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	1.6	2.5	/	mcd	I _F = 10 mA
Viewing Angle	2 θ 1/2	/	60	/	deg	I _F = 10 mA
Peak Wavelength	λ _p	/	697	/	nm	I _F = 10 mA
Dominant Wavelength	λ _d	/	650	/	nm	I _F = 10 mA
Spectrum Radiation Bandwidth	△ λ	/	90	/	nm	I _F = 10 mA
Forward Voltage	V _f	1.5	2.0	2.4	V	I _F = 10 mA
Reverse Current	I _r	/	/	10	μ A	V _R = 5 V









EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH ECN : Page: 7/9

■ Typical Electro-Optical Characteristic Curves

Y

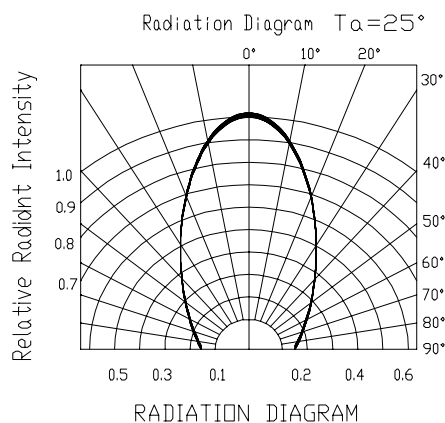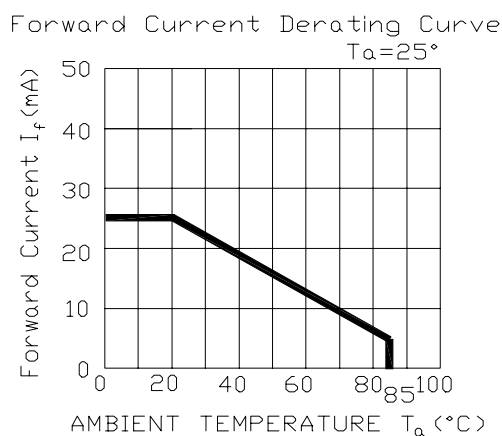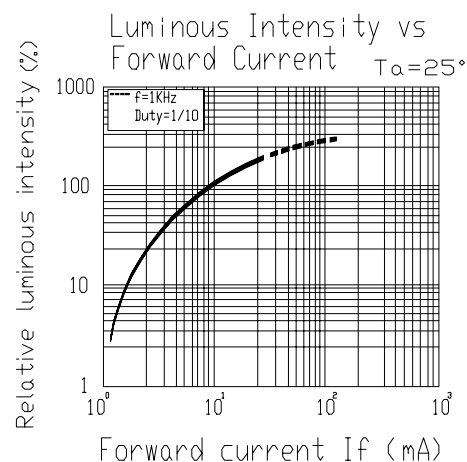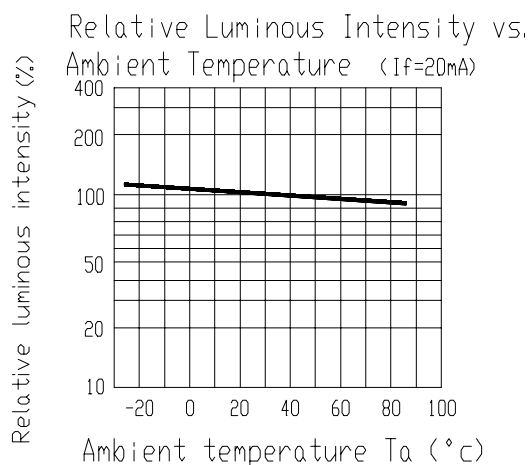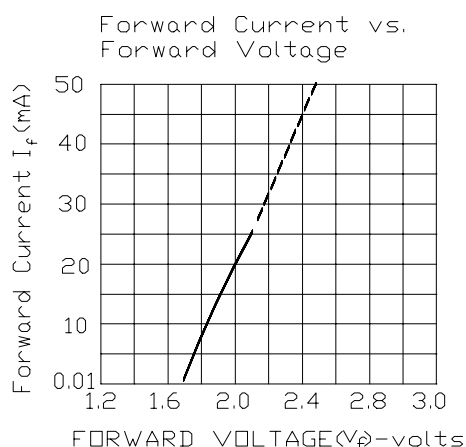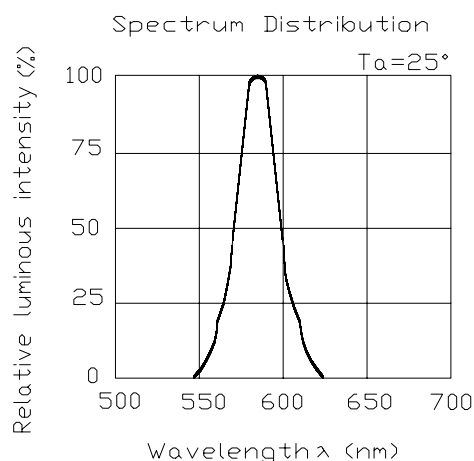









EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH ECN : Page: '8/9

■ Typical Electro-Optical Characteristic Curves

G

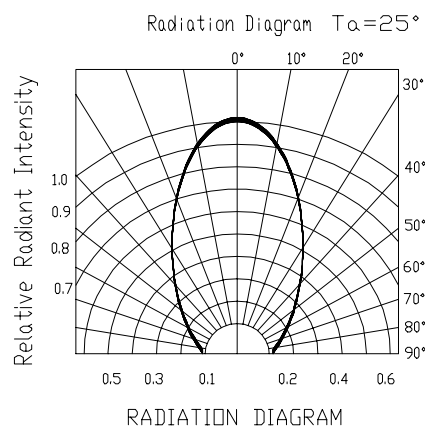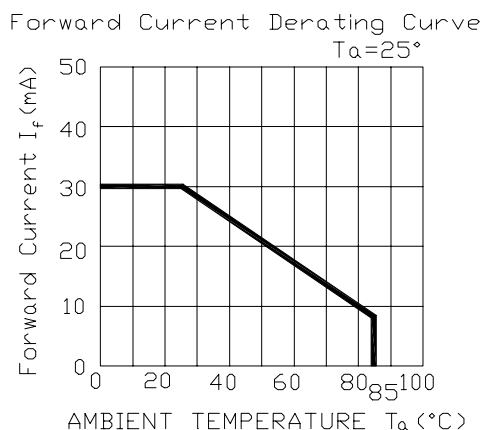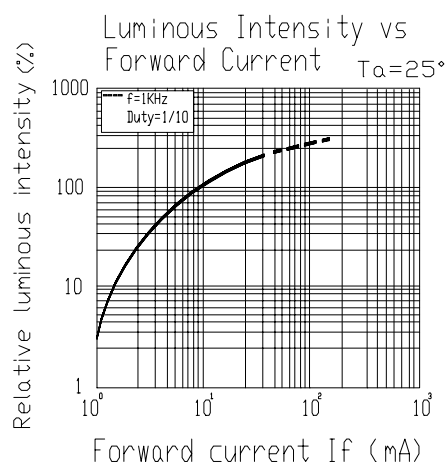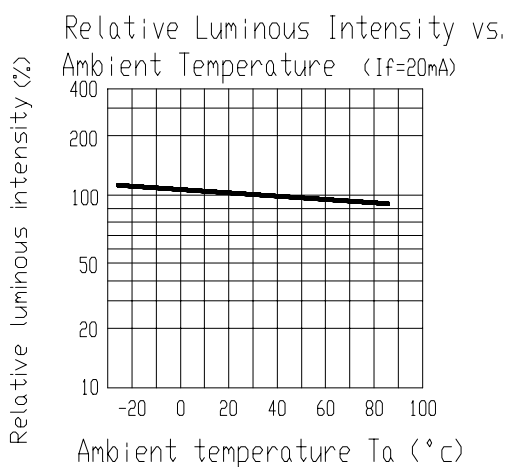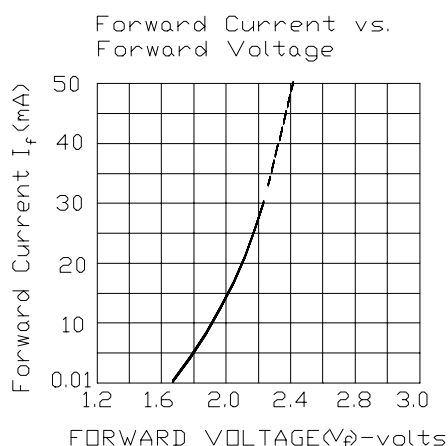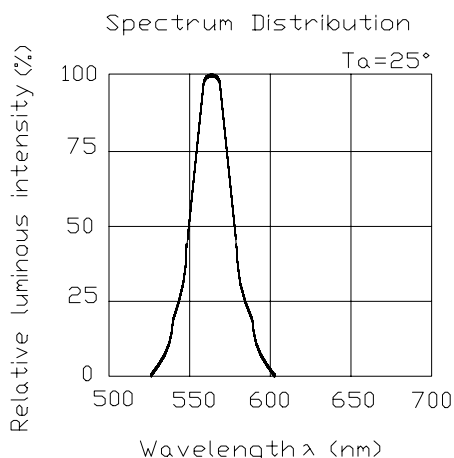



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DAE-139-485 REV: 1.0

PART NO. : A1394B/YGH ECN : Page: 9/9

■ Typical Electro-Optical Characteristic Curves

H

