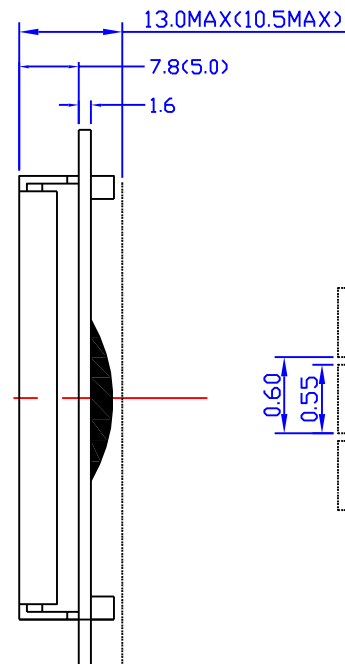
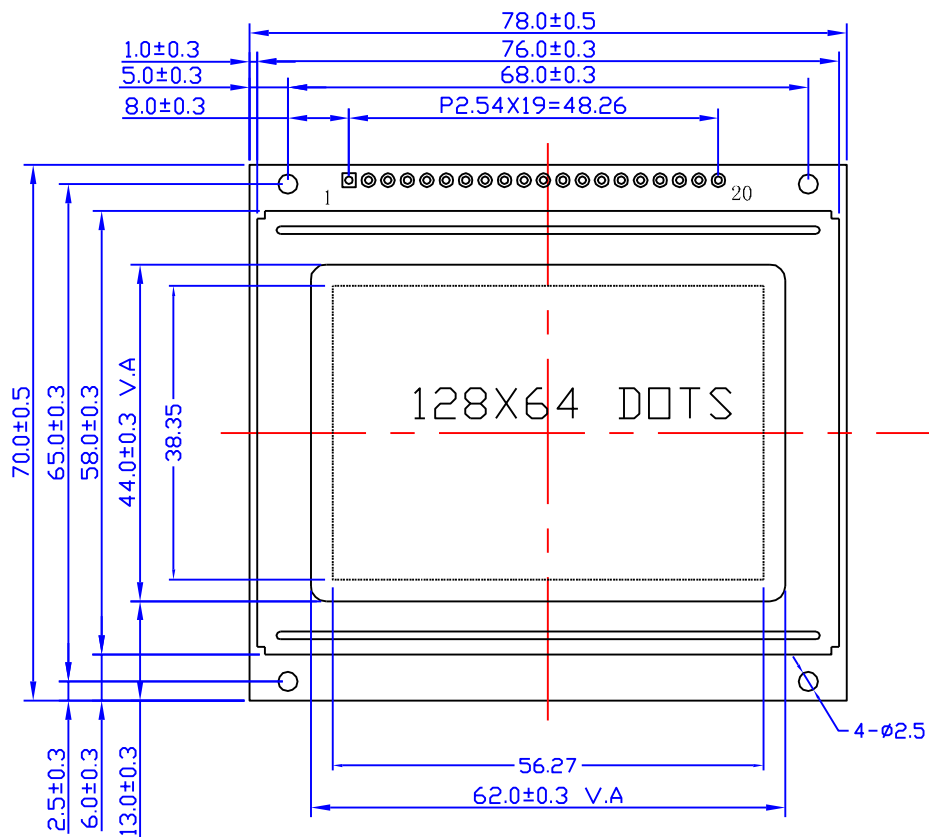


1	/CS1
2	/CS2
3	VSS
4	VDD
5	V0
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	RET
18	VOUT
19	LED(+)
20	LED(-)

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE:TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: -10°C-- +60°C
- 5.STORAGE TEMP: -20°C-- +70°C
- 6.VDD: +5.0V
- 7.DRIVE METHOD: 1/64DUTY 1/9BIAS
- 8.CDNTROLLER: KS0108B
- 9.BACKLIGHT TYPE: LED (YELLOW-GREEN;5.0V)
- 10.ALL UNMARKED TOLERANCES: ±0.30mm

北京中显电子有限公司, www.zxlcd.com					
绘图:		型号:	ZX12864C-20YEYWD	单位:	mm
审核:		版号:	08V01	电话:	52926620
批准:		日期:		传真:	52926621