


ZX19264M1A单页结构图

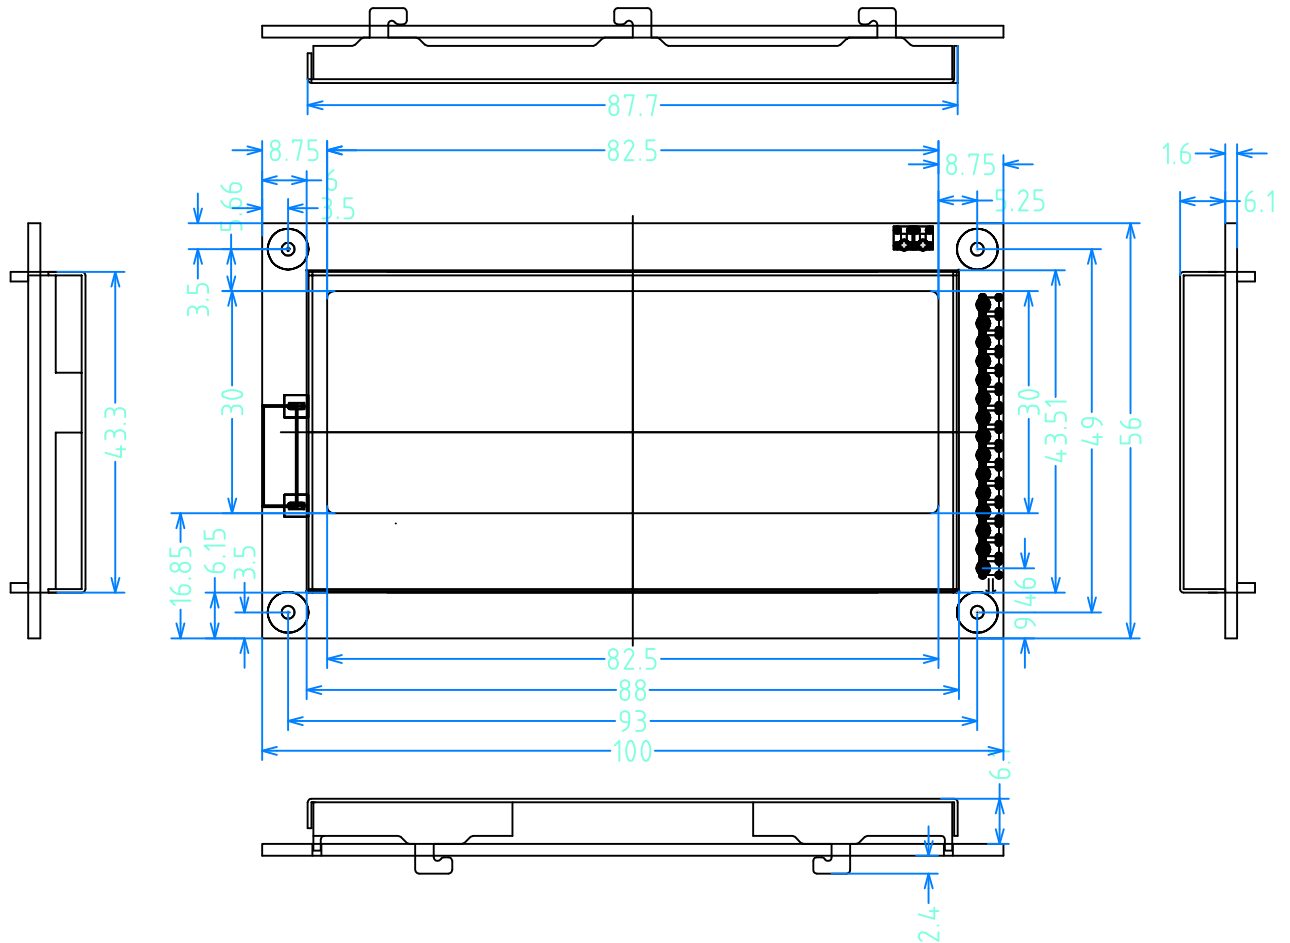

P1, P2

PIN NO.	SIGNAL	PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	VSS	7	BUSY	13	DB2
2	3.3V	8	DB7	14	DB1
3	REQ	9	DB6	15	DB0
4	RST	10	DB5	16	NC(P1)
5	TXD	11	DB4		
6	RXD	12	DB3		

P3

PIN NO.	SIGNAL	PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	N.C	7	TXD	13	N.C
2	N.C	8	TXD	14	N.C
3	VSS	9	N.C	15	VDD
4	VSS	10	N.C	16	VDD
5	N.C	11	RXD	17	N.C
6	N.C	12	RXD	18	N.C

NOTE

- 1 DISPLAY TYPE : FSTN OR STN
- 2 VIEWING DIRECTION: 6 O' CLOCK
- 3 POLARIZER : TRANSMISSIVE
- 4 DRIVE METHOD : 1/64DUTY 1/10BIAS
- 5 OPERATING VOLTAGE: 9.5V(FOR REFERENCE VOLTAGE)
- 6 LOGIC VOLTAGE : 2.7~3.6V
- 7 CONTROLLER : ST5668A
- 8 OPERATING TEMP : -20° C-----+70° C
- 9 STORAGE TEMP : -30° C-----+80° C
- 10 BACK LIGHT : LED

版次 A	ZX19264M1A		SHR:	PLASTIC MAT'L CAVITY:	
			UNIT: mm	SCALE:	 
	MODEL:	SHEET: 1 OF 1	DRAWING BY:		DATE: 2015-2-14
	DWG. NO.	MOLD NO.	CHECK BY:		APPROVED:
北京中显电子有限公司					