


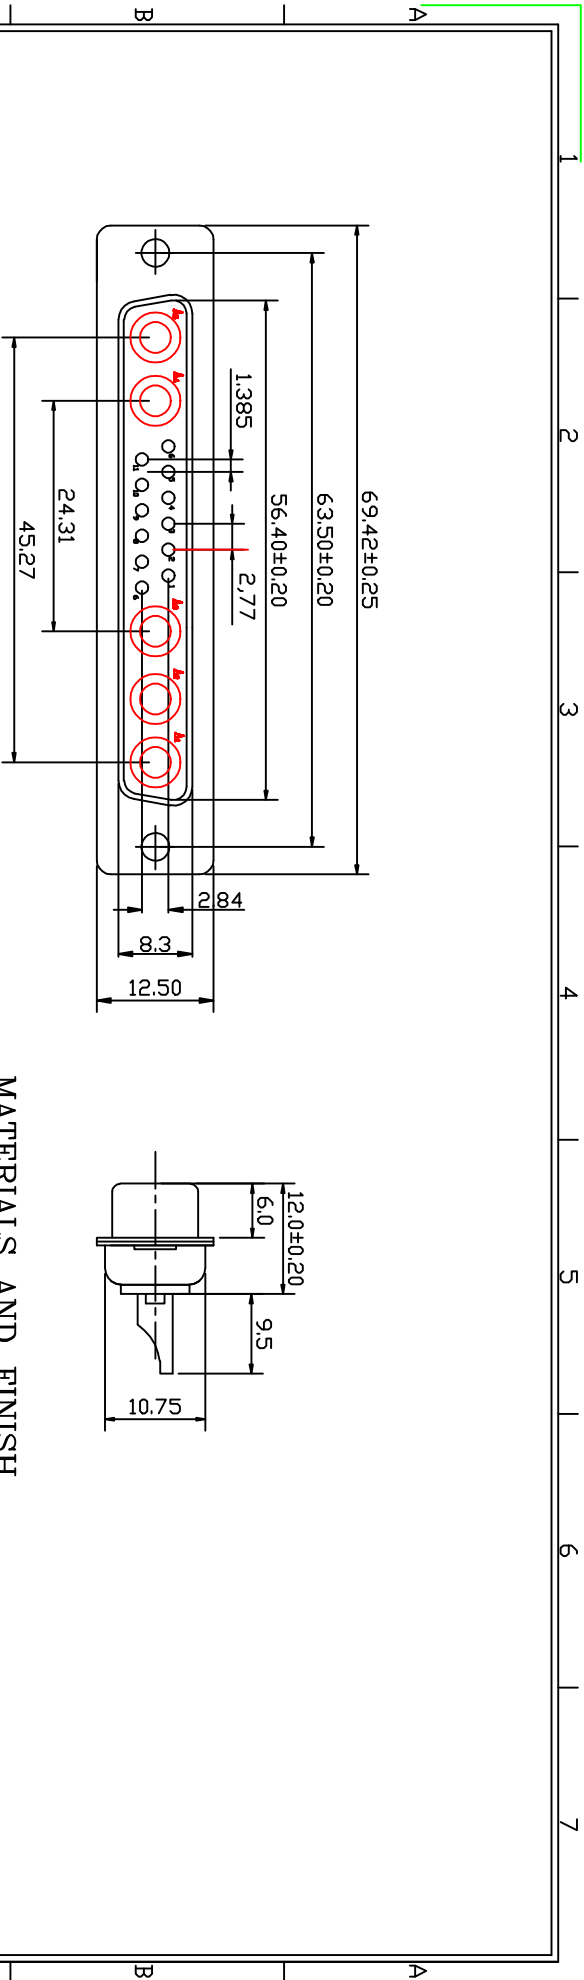


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
HIGH POWER CONTACT MATERIAL: BRASS, 3u"/5u"10u" GOLD PLATED
LOW-POWER CONTACT MATERIAL: BRASS, 1u"/2u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 2000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

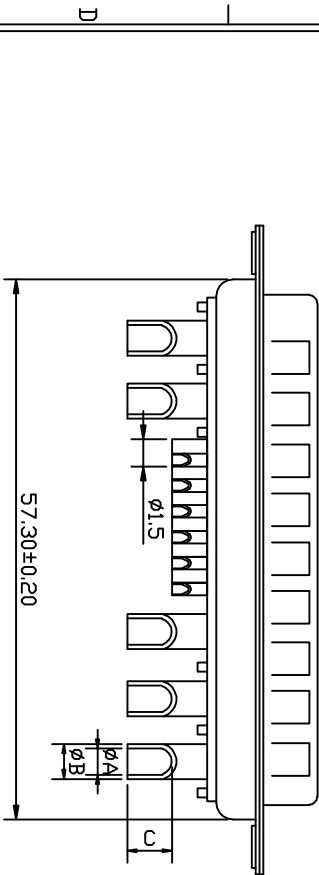

PART NO.00	A	B	C	WIRE	CONDUCTIVITY(Ω)
2	1.7	2.5	4.5	14#10#	10AMPS
4	2.7	3.6	5.0	10#12#	20AMPS
6	3.4	4.4	5.5	8#10#	30AMPS
8	4.6	5.6	5.5	6#8#	40AMPS

SCALE:1:1		SIZE: A4		V. 1. 11L					