
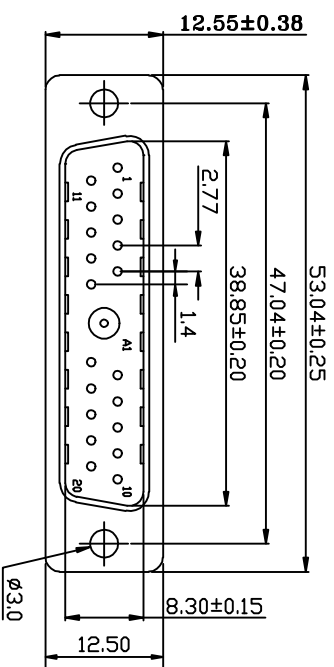


MATERIALS AND FINISH

SHELL: STEEL MATERIAL: TIN FINISHED
DIAPHRAGM: PULG ONLY
CONNECTOR INSULATOR: PBT THERMOPLASTIC
30% GLASS FILLED UL 94V-0 RATED BLACK COLOR
COAXIAL INSULATOR: TEFLON UL 94V-0 WHITE COLOR
HIGH-POWER CONTACT MATERIAL: BRASS, 3U/5U/10U GOLD PLATED
LOW-POWER CONTACT MATERIAL: BRASS, 1U/2U GOLD PLATED

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 10,20,30 RO40AMPS
SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 2000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C
COAXIAL CONTACT IMPEDANCE: 75 OHMS

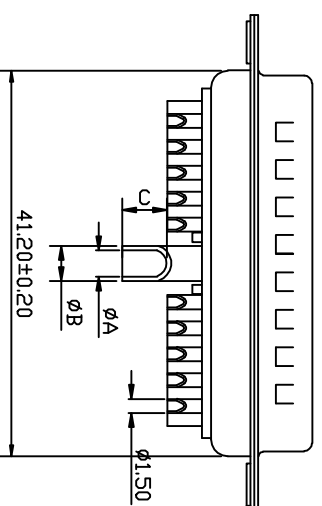

NO	A	B	C	運轉時間	電流強度 (A)
2	1.7	2.5	4.5	1分10秒	10AMPS
4	2.7	3.6	5.0	1分12秒	20AMPS
6	3.4	4.4	5.5	8分10秒	30AMPS
8	4.6	5.6	5.5	6分38秒	40AMPS

[illegible]