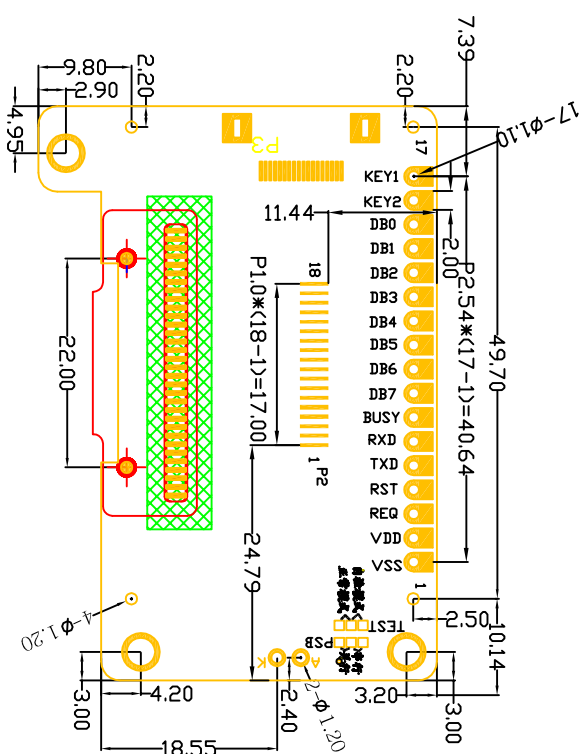
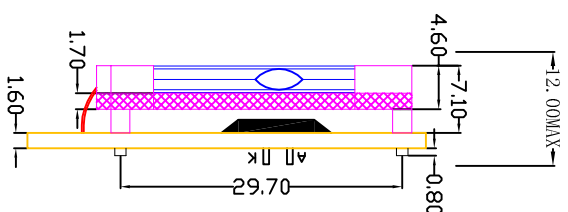
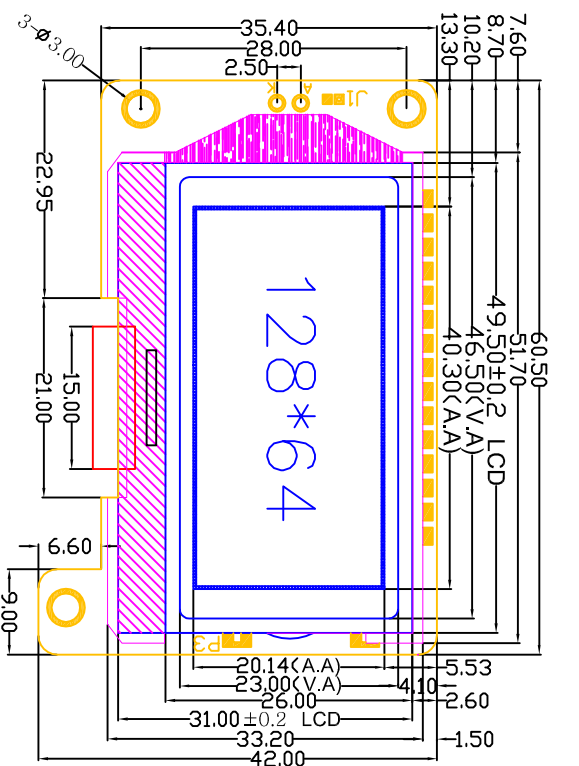


P1, P2

PIN NO.	SIGNAL	PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	VSS	7	BUSY	13	DB2
2	VDD	8	DB7	14	DB1
3	RREQ	9	DB6	15	DB0
4	RST	10	DB5	16	KEY2
5	TXD	11	DB4	17	KEY1
6	RXD	12	DB3	18(P2)	N.C

P3

PIN NO.	SIGNAL	PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	N.C	7	TXD	13	N.C
2	N.C	8	TXD	14	N.C
3	VSS	9	N.C	15	VDD
4	VSS	10	N.C	16	VDD
5	N.C	11	RXD	17	N.C
6	N.C	12	RXD	18	N.C

NOTE

- 1 DISPLAY TYPE : STN
- 2 VIEWING DIRECTION: 12 O'CLOCK
- 3 POLARIZER : TRANSMISSIVE
- 4 DRIVE METHOD : 1/65DUTY 1/9BIAS
- 5 OPERATING VOLTAGE: 9.5V(FOR REFERENCE VOLTAGE)
- 6 LOGIC VOLTAGE : 2.7~3.6V
- 7 CONTROLLER : ST5668A
- 8 OPERATING TEMP : -20° C-----+70° C
- 9 STORAGE TEMP : -30° C-----+80° C
- 10 BACK LIGHT : LED

北京中显电子有限公司 WWW.ZXLCD.COM

TEL:010-82626833 FAX:010-51601226

MODEL NO. : ZX12864M2A液晶模块

DESIGNED BY: LJG

CHECKED BY:

APPROVED BY:

UNIT: MM SCALE: 1:1

DEFAULT TOLERANCE: ±0.2

NO. : 1 OF: 1

DATE: